



SCAN THE QR-CODE:

And view the Page online,
where you will have access
to more information




SIWERTELL HORIZONTAL AND VERTICAL SCREW CONVEYORS

Siwertell screw conveyors are designed to handle a great variety of dry bulk materials, such as cement, lime raw meal, apatite, urea, fly ash and gypsum, under hard conditions. For long distance and high lifting heights, two or more screw conveyors are arranged in series. When large capacities are to be handled, the conveyors can run parallel to each other. The screw conveyors are completely enclosed, which reduces dust creation to a minimum.


They have been supplied to numerous customers for installations worldwide in e.g. industries, port terminals, ships, silos, and power plants. The heart of Siwertell screw conveyors is the easily replaceable intermediate bearing, specially developed to resist wear.

Siwertell horizontal and vertical screw conveyors operate with the helical flight pushing and throwing the bulk material forward by rotational action. Capacities range from 30 to 1,700 m³/h. The rigid and heavy-duty construction of these conveyors reduces wear and enables easy maintenance at infrequent intervals. They are suitable for applications in any kind of environment indoors and outdoors as well as on ships. Modular construction ensures swift and easy installation in new and existing bulk conveying systems.

VERTICAL SCREW CONVEYOR 300-700 SINGLE MOTOR DRIVE

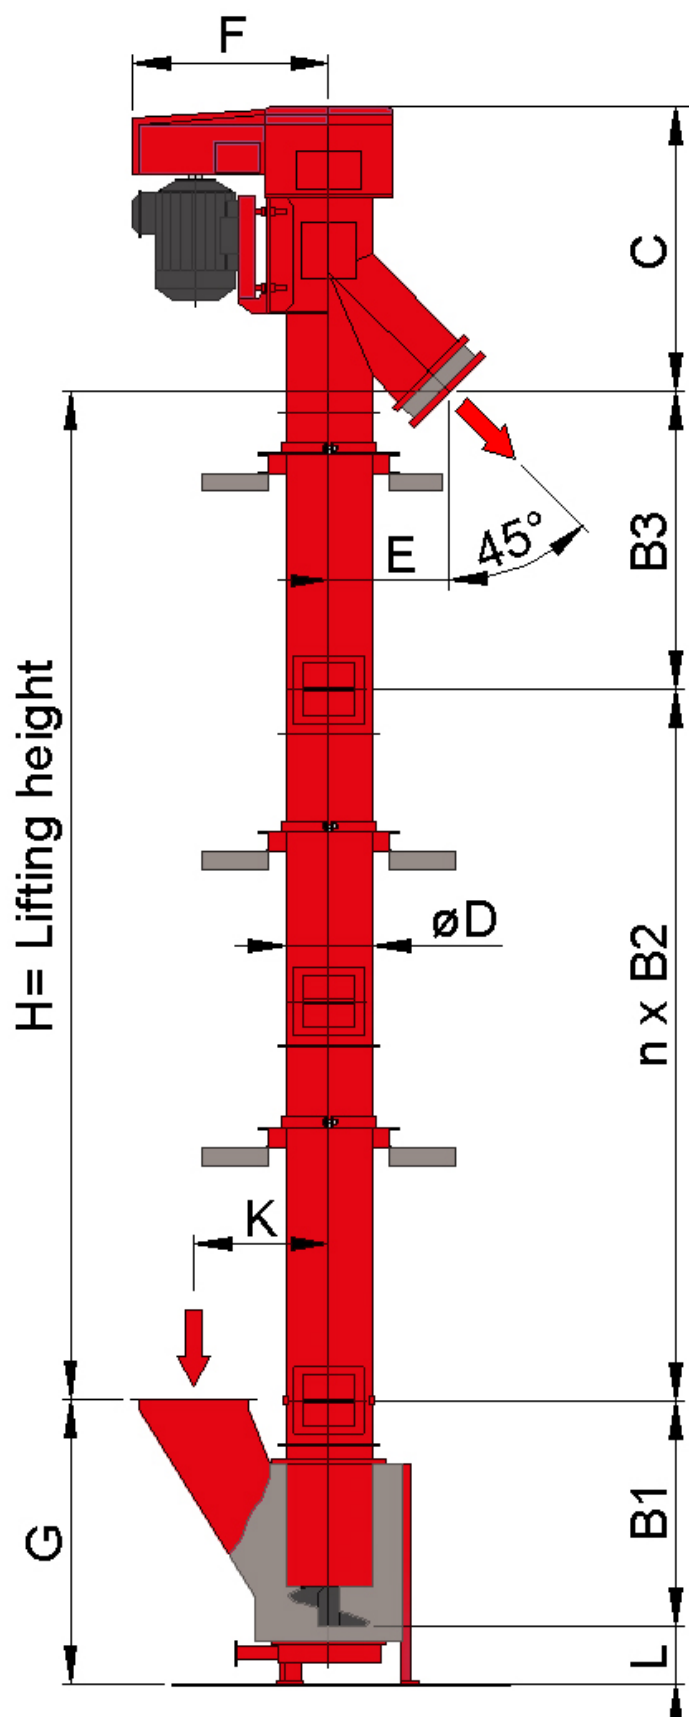


VERTICAL SCREW CONVEYOR 300-700 TWINMOTOR DRIVE

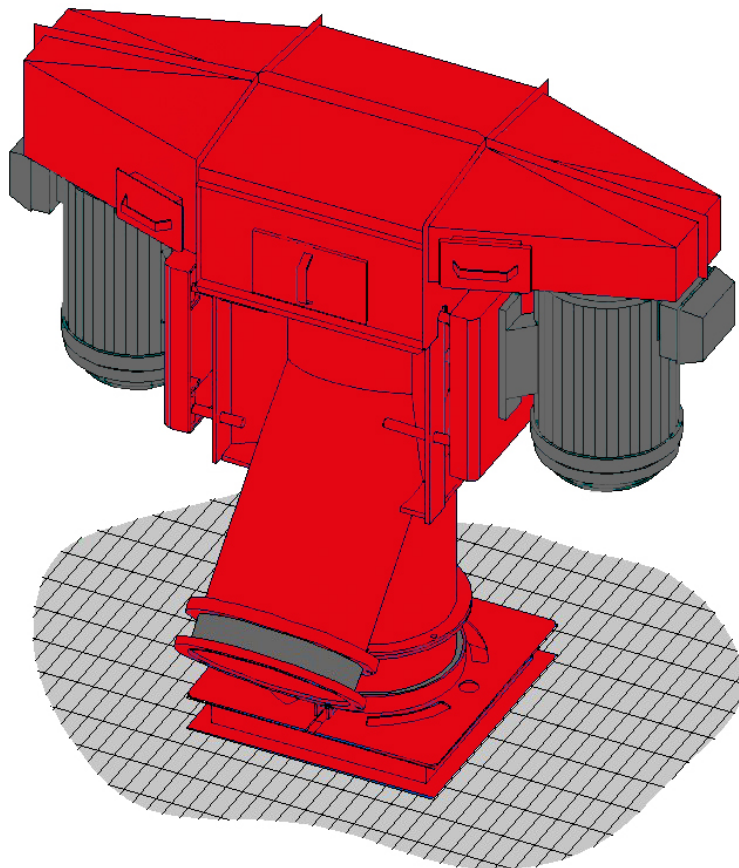

DIMENSIONS VERTICAL SCREW CONVEYOR

Dimensions (mm)										
	B1	B2 (max)	B3 (max)	C	øD	E	F	G	K	L
VSC 700	1600	4800	3850	1900	711	925	1600	1800	1000	325
VSC 600	1600	4800	3850	1800	610	825	1550	1600	900	325
VSC 500	1350	4800	3850	1600	508	700	1400	1600	800	325
VSC 400	1100	4200	3500	1400	406	600	1300	1250	650	300
VSC 300	900	3500	2900	1100	324	470	1000	975	500	275

We reserve the right to make changes.

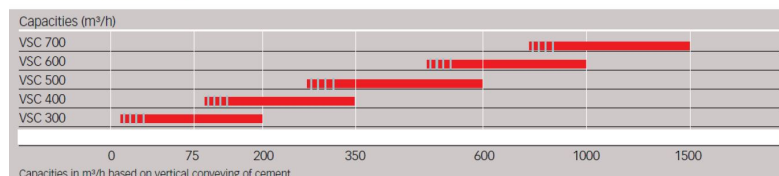


VERTICAL SCREW CONVEYOR FEATURES

- long-life intermediate bearings
- loading box with fluidised bottom
- conveying with different angles
- single or twin motor drive
- v-belt transmission

- speed guard included
- flexible connection at outlet

HORIZONTAL SCREW CONVEYORS

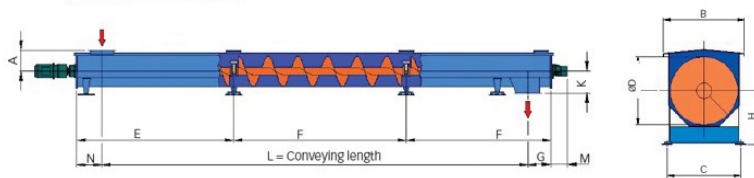

HORIZONTAL SCREW CONVEYORS FEATURES

- reversible conveying direction
- one or more inlets
- one or more outlets
- drive unit can be located at loading or unloading end
- inclined conveying
- various types of drive units
- speed guard included

DIMENSIONS HORIZONTAL SCREW CONVEYORS

Model	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
Length (mm)	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500	8000	8500	9000	9500	10000
Capacity (t/h)	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
Power (kW)	0.5	0.75	1.0	1.25	1.5	1.75	2.0	2.25	2.5	2.75	3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0