



SCAN THE QR-CODE:

And view the Page online,
where you will have access
to more information



SIWERTELL HORIZONTAL AND VERTICAL SCREW CONVEYORS


Siwertell screw conveyors are designed to handle a great variety of dry bulk materials, such as cement, lime raw meal, apatite, urea, fly ash and gypsum, under hard conditions. For long distance and high lifting heights, two or more screw conveyors are arranged in series. When large capacities are to be handled, the conveyors can run parallel to each other. The screw conveyors are completely enclosed, which reduces dust creation to a minimum.

They have been supplied to numerous customers for installations worldwide in e.g. industries, port terminals, ships, silos, and power plants. The heart of Siwertell screw conveyors is the easily replaceable intermediate bearing, specially developed to resist wear.

Siwertell horizontal and vertical screw conveyors operate with the helical flight pushing and throwing the bulk material forward by rotational action. Capacities range from 30 to 1,700 m³/h. The rigid and heavy-duty construction of these conveyors reduces wear and enables easy maintenance at infrequent intervals. They are suitable for applications in any kind of environment indoors and outdoors as well as on ships. Modular construction ensures swift and easy installation in new and existing bulk conveying systems.

VERTICAL SCREW CONVEYOR 300-700 SINGLE MOTOR DRIVE


VERTICAL SCREW CONVEYOR 300-700 TWINMOTOR DRIVE

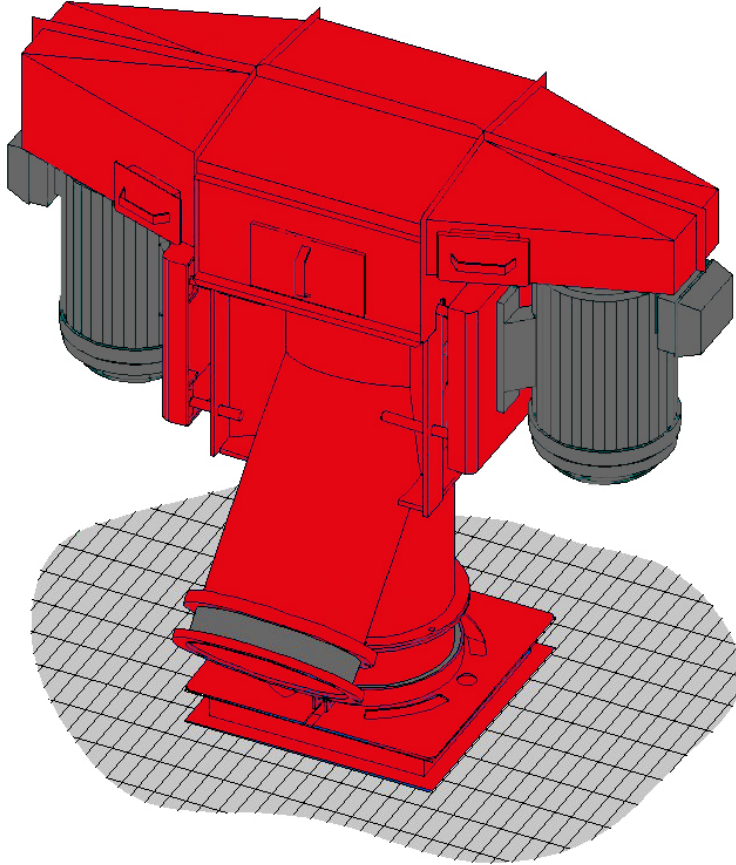

DIMENSIONS VERTICAL SCREW CONVEYOR

Dimensions (mm)										
	B1	B2 (max)	B3 (max)	C	øD	E	F	G	K	L
VSC 700	1600	4800	3850	1900	711	925	1600	1800	1000	325
VSC 600	1600	4800	3850	1800	610	825	1550	1600	900	325
VSC 500	1350	4800	3850	1600	508	700	1400	1600	800	325
VSC 400	1100	4200	3500	1400	406	600	1300	1250	650	300
VSC 300	900	3500	2900	1100	324	470	1000	975	500	275

We reserve the right to make changes.

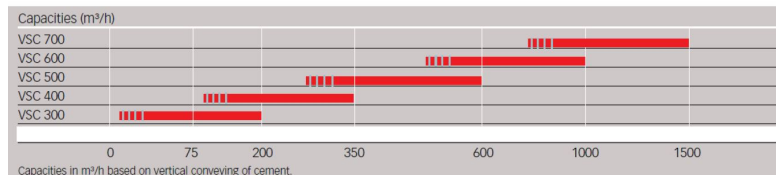


VERTICAL SCREW CONVEYOR FEATURES

- long-life intermediate bearings
- loading box with fluidised bottom
- conveying with different angles
- single or twin motor drive
- v-belt transmission

- speed guard included
- flexible connection at outlet

HORIZONTAL SCREW CONVEYORS

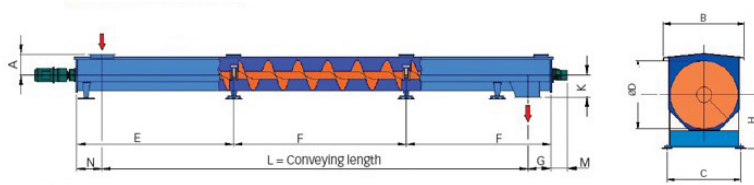

HORIZONTAL SCREW CONVEYORS FEATURES

- reversible conveying direction
- one or more inlets
- one or more outlets
- drive unit can be located at loading or unloading end
- inclined conveying
- various types of drive units
- speed guard included

DIMENSIONS HORIZONTAL SCREW CONVEYORS

Model	Capacity (t/h)	Length (m)	Width (mm)	Height (mm)	Weight (kg)
HC 100	100	10	1000	1000	1000
HC 150	150	15	1500	1500	1500
HC 200	200	20	2000	2000	2000
HC 250	250	25	2500	2500	2500
HC 300	300	30	3000	3000	3000
HC 350	350	35	3500	3500	3500
HC 400	400	40	4000	4000	4000
HC 450	450	45	4500	4500	4500
HC 500	500	50	5000	5000	5000
HC 550	550	55	5500	5500	5500
HC 600	600	60	6000	6000	6000
HC 650	650	65	6500	6500	6500
HC 700	700	70	7000	7000	7000
HC 750	750	75	7500	7500	7500
HC 800	800	80	8000	8000	8000
HC 850	850	85	8500	8500	8500
HC 900	900	90	9000	9000	9000
HC 950	950	95	9500	9500	9500
HC 1000	1000	100	10000	10000	10000